
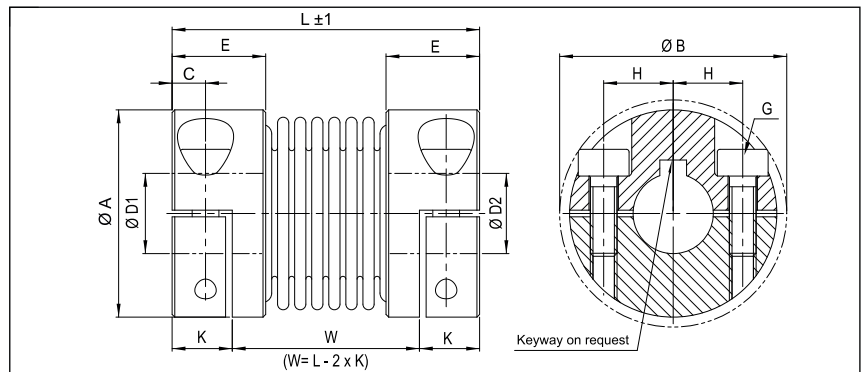


Miniature Metal Bellows Coupling
with split hubs

optional
laserwelded
optional full stainless
steel version

KB2H



Order Code

KB2H / 45 - 50 - 10 - 16 - (S)

Type / Size

Length
L

ØD1
(H7)

ØD2
(H7)

Options

Size	Torque TKN (Nm)	Dimensions (mm)										Technical Data							
		L	Ø A	Ø D1/D2	H	C	E	Ø B	W	K	G	Mass (g)	Moment of Inertia J (g cm²)	Spring Stiffness			Misalignment		
		Length	Outer Ø	Bore Sizes (H7) min-max			Hub- length			Screw (ISO4762) TA (Nm)	torsional CT (Nm/rad)			radial CR (N/mm)	axial CA (N/mm)	radial ΔKr (mm)	axial ΔKa (mm)	angular ΔKw (°)	
5	0.5	21	15.5	3-8	5.2	2.5	7	17.5	12	4.5	M2	7.5	2.7	260	43	13	0.1	0.2	1
		25							16		0.43	7.8	2.8	200	18	10	0.15	0.3	1.5
		28							19		0.43	8.2	3	160	9	8	0.2	0.4	2
10	1	23	15.5	3-8	5.2	2.5	7	17.5	14	4.5	M2	9	3.1	510	74	27	0.1	0.2	1
		26							17		0.43	9.3	3.4	380	31	20	0.15	0.3	1.5
		31							22		0.43	10	3.7	310	16	16	0.2	0.4	2
15	1.5	26	20	3-10	7	3	8.5	21	14.4	5.8	M2.5	13	8	750	59	15	0.1	0.3	1.5
		31		10#					19.4		0.85	15	9.3	700	20	9	0.15	0.4	2
20	2	32	25	3-14	9	3.5	11	27	18.4	6.8	M3	29	24	1500	67	12	0.15	0.3	1.5
		38							24.4		2	32	27	1300	21	11	0.2	0.4	1.5
		42							28.4			33	29	1050	11	9	0.25	0.5	2
45	4.5	41	32.5	6-18	12	5	13	34	24	8.5	M4	61	100	6500	168	32	0.1	0.3	1.5
		50		18#					33		3.5	67	112	4200	41	20	0.2	0.5	2
100	10	47	40.5	6-25	15.5	5	13.5	41.5	29	9	M4	86	233	8100	120	27	0.15	0.4	1.5
		57		25#					39		4.5	106	290	6800	29	17	0.3	0.6	2

Speed	max. 15000 min ⁻¹
Material	bellows - stainless steel hub - aluminium
Hub	bore tolerance: H7
Temperature Range	-30 °C ~ 120 °C
Keyway	optional acc. DIN 6885 biggest bore marked with a #