

we couple  
the drive




# CATALOG COLLARS

KBK 20

Collar  
single slit

# KR

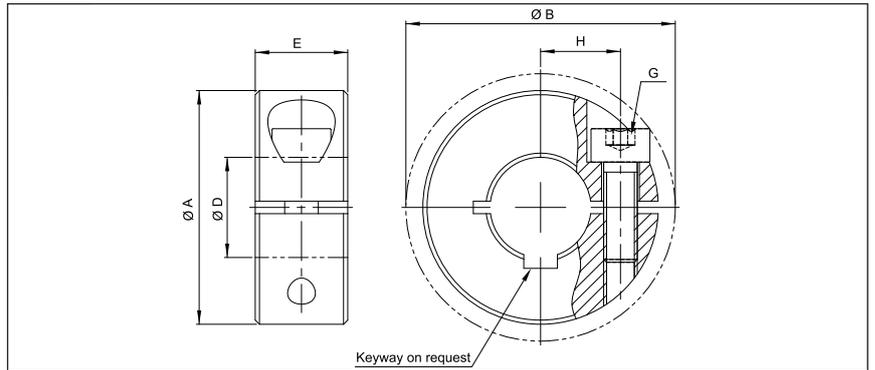

<b>Order Code</b>	<b>KR</b>	<b>-</b>	<b>28</b>	<b>steel blackened</b>
	Type		Size	
<b>Order Code</b>	<b>KR-VA</b>	<b>-</b>	<b>28</b>	<b>stainless steel</b>
	Type		Size	


Collar single slit											
Size	axial force N		Dimensions					F Screw (ISO4762)	Tightening Torque Screws Nm		Mass kg
	steel	stainless steel (VA)	Standard Bore D / H7	A mm	H mm	E mm	B mm		steel	stainless steel (VA)	
4	1525	867	4	16	5	9	20.7	M3x8	2	1.3	0.010
5	1525	867	5	16	5	9	20.7	M3x8	2	1.3	0.011
6	1525	867	6	16	5	9	20.7	M3x8	2	1.3	0.011
8	1525	867	8	18	6	9	22.4	M3x8	2	1.3	0.012
10	1335	758	10	24	8	9	26	M3x10	2	1.3	0.022
12	2415	1398	12	28	9.5	11	31.8	M4x12	5	3	0.039
15	3940	2288	15	34	12	13	39.4	M5x16	10	6	0.065
16	3940	2288	16	34	12	13	39.4	M5x16	10	6	0.063
18	3803	2208	18	36	13	13	41.1	M5x16	10	6	0.069
20	5540	4612	20	40	14.5	15	46.4	M6x18	15	10	0.097
22	5378	4477	22	42	15.5	15	48.1	M6x18	15	10	0.103
25	5236	4358	25	45	16.5	15	50.8	M6x18	15	10	0.144
28	5053	4206	28	48	18	15	53.7	M6x18	15	10	0.123
30	4809	4003	30	54	21	15	58.6	M6x18	15	10	0.163
40	4468	3719	40	60	25	15	65	M6x18	15	10	0.163
50	8135	4729	50	78	32	19	87	M8x25	42	25	0.386

<b>Bore tolerance</b>	H7
<b>Material</b>	steel blackened stainless steel blank
<b>Keyway</b>	optional acc. DIN 6885
<b>Temperature Range</b>	-40 °C ~ 175 °C



Collar  
in wide version

# KR-B

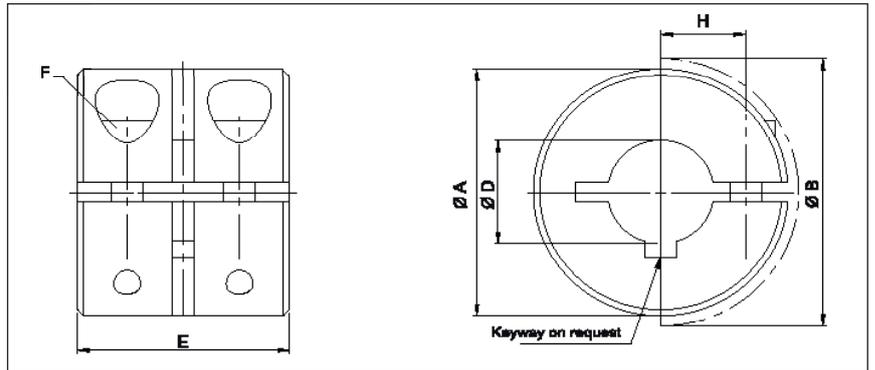


<b>Order Code</b>	<b>KR-B</b>	<b>-</b>	<b>16</b>	<b>steel blackened</b>
	Type		Size	
<b>Order Code</b>	<b>KR-B-VA</b>	<b>-</b>	<b>16</b>	<b>stainless steel</b>
	Type		Size	

Collar in wide version											
Size	axial force N		Dimensions					F Screw (ISO4762)	Tightening Torque Screws Nm		Mass kg
	steel	stainless steel (VA)	Standard Bore D / H7	A mm	H mm	E mm	B mm		steel	stainless steel (VA)	
6	3050	1734	6	16	5	20	20.7	M3x8	2	1.3	0.025
8	3050	1734	8	18	6	20	22.4	M3x8	2	1.3	0.030
10	2670	1516	10	24	8	20	26	M3x10	2	1.3	0.052
12	4830	2796	12	28	9,5	24	31.8	M4x12	5	3	0.086
16	7880	4576	16	34	12	29	39.4	M5x16	10	6	0.148
20	11080	9224	20	40	14.5	33	47.5	M6x18	15	10	0.229
25	10472	8716	25	45	16.5	33	50.8	M6x18	15	10	0.266
30	9618	8006	30	54	21	33	58.6	M6x18	15	10	0.384
40	8936	7438	40	60	25	33	66	M6x18	15	10	0.383
50	16270	9458	50	78	32	41	87	M8x25	42	25	0.837

<b>Bore tolerance</b>	H7
<b>Material</b>	steel blackened stainless steel blank
<b>Keyway</b>	optional acc. DIN 6885
<b>Temperature Range</b>	-40 °C ~ 175 °C

Collar  
split, in wide version

# KR-GB

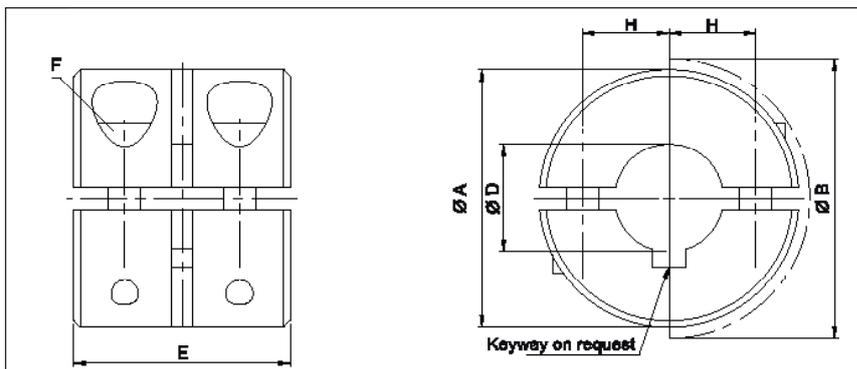

<b>Order Code</b>	<b>KR-GB</b>	-	<b>20</b>	<b>steel blackened</b>
	Type		Size	
<b>Order Code</b>	<b>KR-GB-VA</b>	-	<b>20</b>	<b>stainless steel</b>
	Type		Size	

Collar split, in wide version											
Size	axial force N		Standard					F Screws (ISO4762)	Tightening Torque Screws Nm		Mass kg
	steel	stainless steel (VA)	Bore	A mm	H mm	E mm	B mm		steel	stainless steel (VA)	
6	4576	2600	6	16	5	20	20.7	M3x8	2	1.3	0.024
8	4576	2600	8	18	6	20	22.4	M3x8	2	1.3	0.029
10	4576	2600	10	24	8	20	26	M3x10	2	1.3	0.050
12	7904	4576	12	28	9.5	24	31.8	M4x12	5	3	0.083
16	12896	7488	16	34	12	29	39.4	M5x16	10	6	0.143
20	18616	15496	20	40	14.5	33	47.5	M6x18	15	10	0.224
25	18616	15496	25	45	16.5	33	50.8	M6x18	15	10	0.258
30	18616	15496	30	54	21	33	58.6	M6x18	15	10	0.372
40	18616	15496	40	60	25	33	66	M6x18	15	10	0.373
50	29120	19344	50	78	32	41	87	M8x25	42	25	0.790

<b>Bore tolerance</b>	H7
<b>Material</b>	steel blackened stainless steel blank
<b>Keyway</b>	optional acc. DIN 6885
<b>Temperature Range</b>	-40 °C ~ 175 °C



